


Solar Pump Inverter

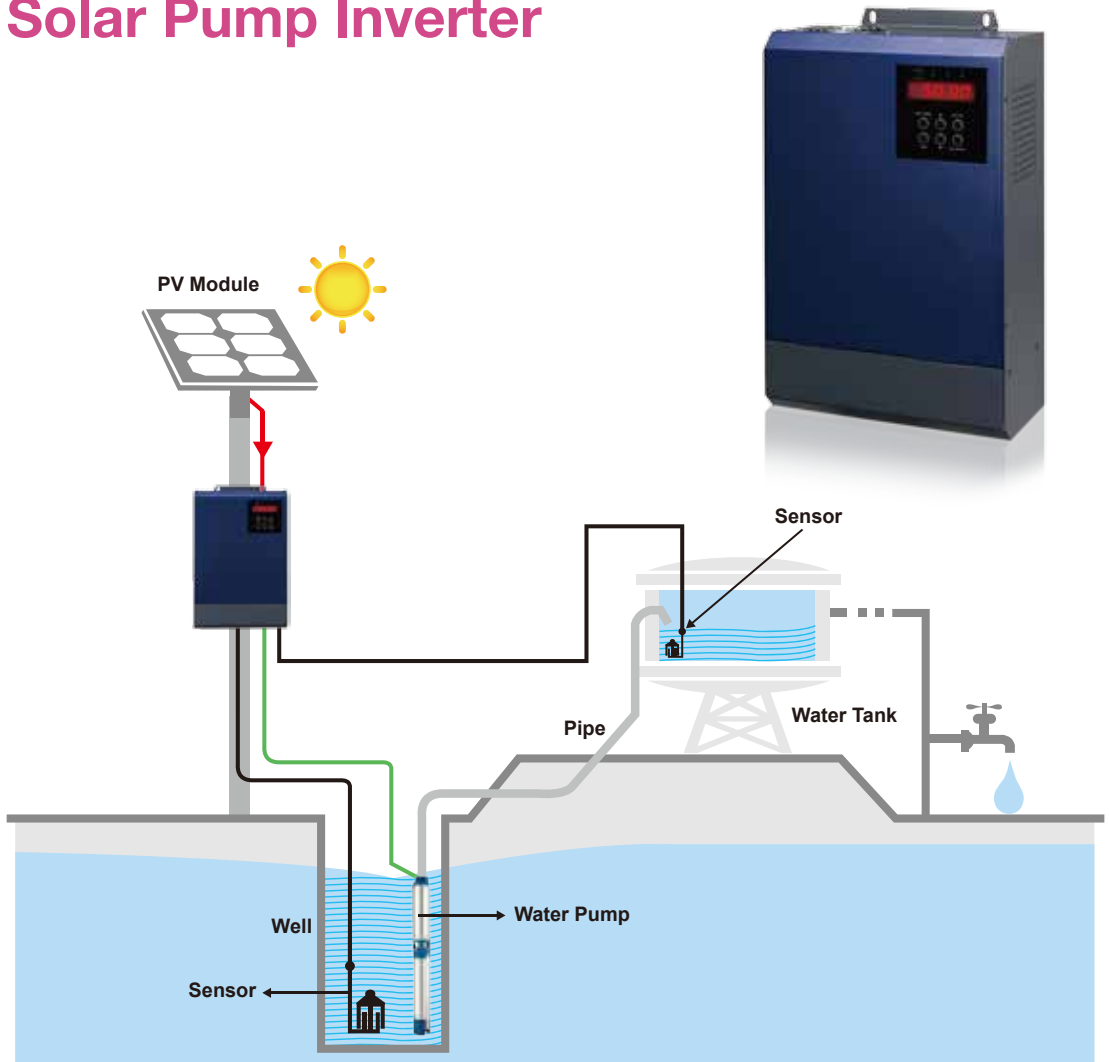

Aspire Solar Pump Inverter

- ▶ Built-in MPPT solar charger
- ▶ Supports three-phase asynchronous motor
- ▶ Built-in full protection and self-diagnosis
- ▶ Soft start function prevents water hammer effect and extends system lifecycle
- ▶ Comprehensive LEDs and display screen for real-time system status
- ▶ Remote monitoring through RS-485

Aspire Solar Pump Inverter Selection Guide

MODEL	Aspire 2.2KW	Aspire 7.5KW	Aspire 11KW
PHASE	3-phase in / 3-phase out		
MAXIMUM PV ARRAY POWER	3500 W	12000 W	17600 W
RATED OUTPUT POWER	2200 W	7500 W	11000 W
PV INPUT (DC)			
Maximum DC Voltage	800 VDC		
Start-up Voltage	350 VDC		
MPPT Voltage Range	500 ~ 600 VDC		
Number of MPP Trackers	1		
OUTPUT			
Nominal Voltage	3 x 380/400/415/440 VAC		
Efficiency	> 97%		
Output Current	5.1 A	17 A	26 A
Motor Type	Three-phase asynchronous motor		
Frequency Precision	±0.2%		
PROTECTION			
Full Protection	Over-voltage, under-voltage, over-current, surge, over-temperature, short circuit protection		
PHYSICAL			
Dimension, D x W x H (mm)	110 x 230 x 342		
Net Weight (kgs)	5.5	6	6.5
Type of Mechanical Protection	IP20		
INTERFACE			
Communication Port	RS-232/RS-485		
ENVIRONMENT			
Humidity	< 95% RH (No condensing)		
Operating Temperature	-20°C~45°C at 100% full load, 46°C~60°C power derating		

Product specifications are subject to change without further notice



VOLTRONIC POWER TECHNOLOGY CORP.

Taiwan: 5F, No.151, Xinhua 1st Road., Neihu Dist., Taipei, Taiwan, R.O.C. TEL: 886-2-27918296 FAX: 886-2-87918216 www.voltronicpower.com

China: 1-4F, Building 5, YuSheng Industrial Park, No.467, Section Xixiang, National Highway 107, Xixiang, Bao An District, Shenzhen, China TEL: 86-755-86016601 FAX: 86-755-86016603